



Load Cell Model FAC


Material: Aluminum



Outline

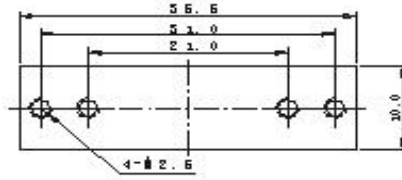

Capacity: 2Kg, 5Kg



Specifications

Comprehensive Error		0.05
Output Sensitivity	(mV/V)	1.0 ± 0.1
Nonlinearity	(%F.S)	± 0.03
Repeatability	(%F.S)	± 0.03
Hysteresis	(%F.S)	± 0.03
Creep	(%F.S/3min)	± 0.03
Zero Drift	(%F.S/1min)	± 0.03
Temp. Effect on Zero	(%F.S/10°C)	± 0.3
Temp. Effect on Output	(%F.S/10°C)	≤ 0.05
Zero Output	(%F.S)	± 0.5
Input Resistance	(Ω)	1000 ± 2
Output Resistance	(Ω)	1000 ± 2
Insulation Resistance	(MΩ)	≥ 2000
Excitation Voltage	(V)	≤ 6
Operation Temp Range	(°C)	0--+50
Overload Capacity	(%F.S)	150
Capacity(kg)		2, 5
Material		Aluminum alloy
Protection		IP65
Recommended Applications		Food scale sensors

Note: All Specifications Subject To Change Without Notice & Custom-made Products Are Available.